REACH-IN BOTTOM-MOUNT SERIES

FREEZER

Features



- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- 3 adjustable, heavy-duty epoxy coated wire shelves per door
- Condensate heating element built into condensate pan for efficient evaporation of excess water
- Freezer door frames have integral factory installed heating element to eliminate condensation
- Easy to mount 4" casters (lockable in front) are standard with all units
- Locking doors on all units. IB19F/27F door swing is field reversible
- Self-closing doors that remain open at 90 degrees
- Magnetic gasket can be replaced without any tools
- Exterior: 430 stainless steel
- Interior: 304 stainless steel
- Temperature: 0 to -10°F / -17 to -23°C
- Electrical: 115/60/1 with NEMA 5-15P plug IB81F DV: 115/208-230/60/1 with NEMA L14-20P plug, 10ft cord
- R-290 Natural Refrigerant



IB19F



IB27F*



NEMA 5-15P



IB54F*



NEMA L14-20P



IB81F-DV


Specifications

DESIGNED TO OPERATE IN AMBIENT TEMPERATURES BETWEEN 40F-90F FOR OPTIMUM PERFORMANCE.

Model	Doors	Ext. Dimensions W X D X H (In)	Int.. Dimensions W X D X H (In)	Amps	H.P	Ship Weight
IB19F	1	26.8 X 25.6 X 82.3	22.2 X 21.5 X 50.2	5	1/4	295 lbs
IB27F*	1	26.8 X 32.7 X 82.3	22.2 X 27.6 X 50.2	11	5/8	329 lbs
IB54F*	2	53.9 X 32.7 X 82.3	49.4 X 27.6 X 50.2	12	1	501 lbs
IB81F-DV	3	81.0 X 32.7 X 82.3	76.4 X 27.6 X 50.2	8	1 1/4	625 lbs

REACH-IN BOTTOM-MOUNT SERIES
FREEZERS


Dimensions in inches (mm)

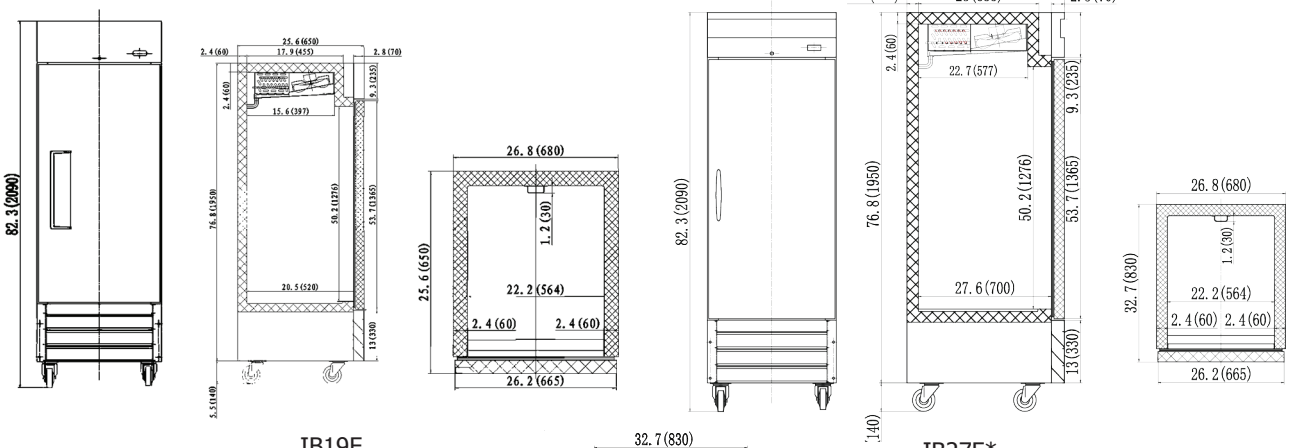


IB19F

IB27F*

IB54F*

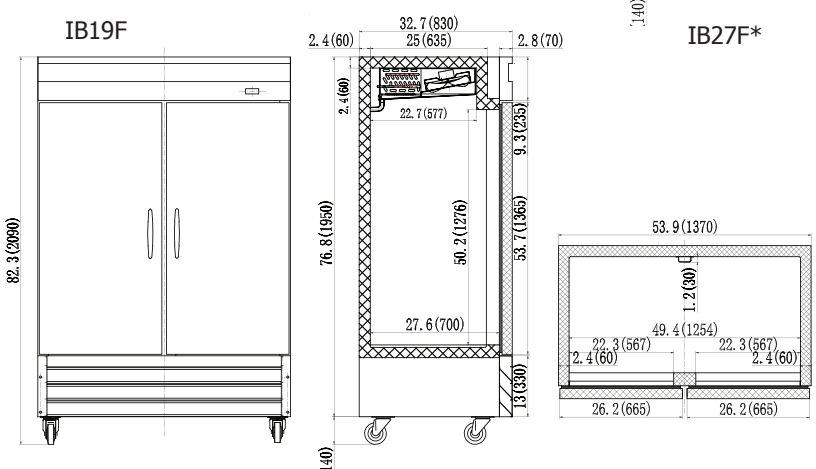

IB81F-DV

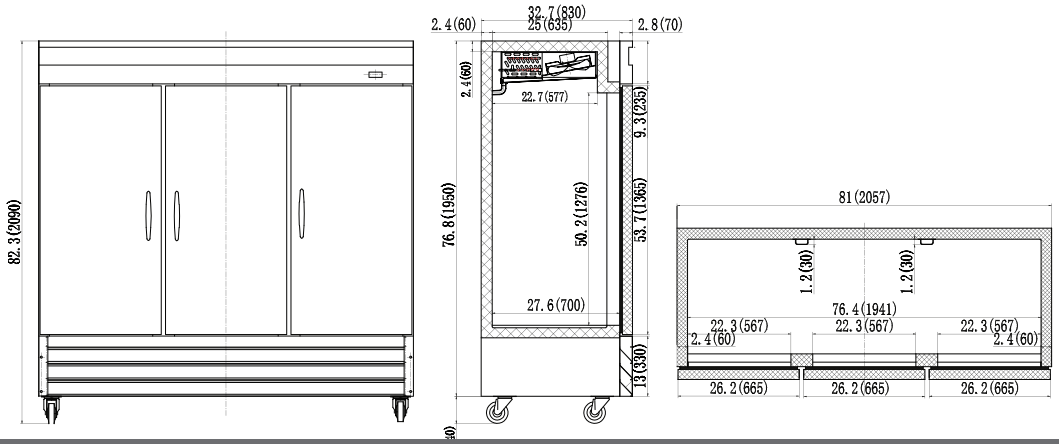

Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100

3560 NW 56th St.
Fort Lauderdale, FL 33309 USA

Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com

5659 Royalmount Ave.
Montreal, QC H4P2P9 CANADA

www.mvpgroupcorp.com