

Millivolt Control
FRYERS

Features


- The Ikon Gas Fryer line has a tube heat exchange design that incorporates fast temperature recovery and large cold zone.
- Stainless steel fry tanks are completely pressure blasted (peened) for smoother finish and easy cleaning.
- 30,000 BTU / burner
- Models: 3, 4, & 5 tube
- Millivolt (snap action) thermostat, 200°F - 400°F
- Stainless steel front and door
- Sides and back are galvanized steel
- Large cold zone to trap food particles
- 1-1/4" dia. full port drain valve for fast and complete oil draining
- Four (4) 5" casters standard, adjustable stainless steel legs optional*
- Drain pipe holder attached to inside door
- Twin nickel plated baskets
- Superior construction, finish, & appearance
- Available in Natural gas(NG) or Liquid Propane(LP)



**Adjustable legs come as a set of four (4) [Part # 119-0020(4)]*



Millivolt Control
FRYERS

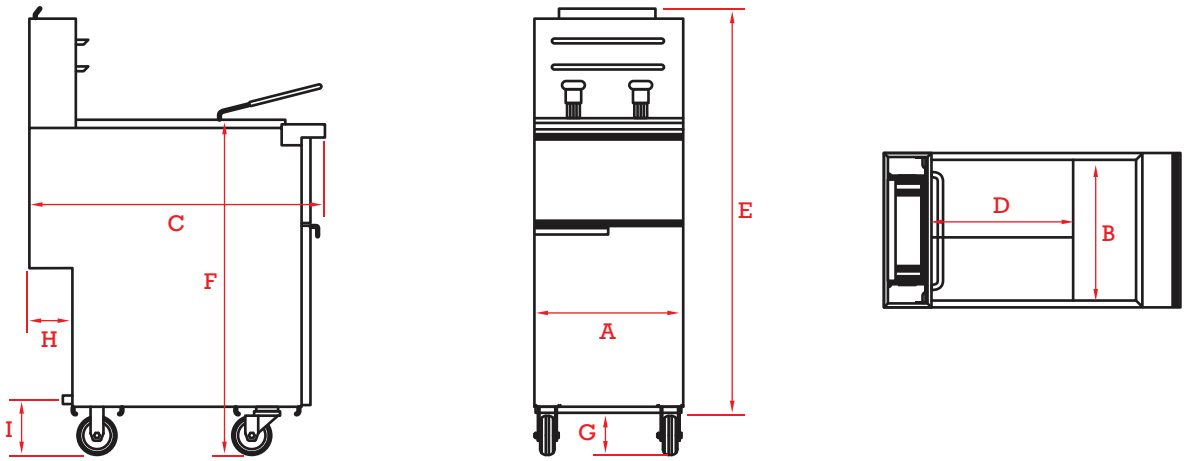

Specifications

Model	Width		Depth		Height		Clearance			Weight	Shipping	Ship.
	A	B	C	D	E	F	G	H	I		Dimenisons	Weight
IGF-35/40-NG	15.5"	14.0"	30.8"	14.0"	39.4"	33.7"	5.0"	4.2"	6.0"	133 lbs	18.5"W x 33.5"D x 33.1"H	145 lbs
IGF-35/40-LP	(39.4cm)	(35.5cm)	(78.2cm)	(35.5cm)	(100cm)	(85.6cm)	(12.7cm)	(10.6cm)	(15.2cm)	(60.4kg)	(47cm x 85.1cm x 84cm)	(65.8kg)
IGF-40/50-NG	15.5"	14.0"	30.8"	14.0"	39.4"	33.7"	5.0"	4.2"	6.0"	140 lbs	18.5"W x 33.5"D x 33.1"H	158 lbs
IGF-40/50-LP	(39.4cm)	(35.5cm)	(77.0cm)	(35.5cm)	(100cm)	(85.6cm)	(12.7cm)	(10.6cm)	(15.2cm)	(63.6kg)	(47cm x 85.1cm x 84cm)	(71.8kg)
IGF-75/80-NG	21.0"	18.0"	34.3"	18.0"	39.4"	33.7"	5.0"	4.2"	6.0"	210 lbs	24.4"W x 37.4"D x 33.1"H	265 lbs
IGF-75/80-LP	(53.3cm)	(45.7cm)	(87.1cm)	(45.7cm)	(100cm)	(85.6cm)	(12.7cm)	(10.6cm)	(15.2cm)	(95.5kg)	(62cm x 95cm x 84cm)	(120.5kg)

Model	Oil Capacity	Gas Type	Heat Tubes	Tube BTU's	Total BTU's
IGF-35/40	35-40 lbs	Natural	3	30,000	90,000
IGF-35/40	35-40 lbs	LP	3	30,000	90,000
IGF-40/50	40-55 lbs	Natural	4	30,000	120,000
IGF-40/50	40-55 lbs	LP	4	30,000	120,000
IGF-75/80	75-80 lbs	Natural	5	30,000	150,000
IGF-75/80	75-80 lbs	LP	5	30,000	150,000

GAS REQUIREMENTS
- Natural Gas or Liquid Propane (LP) Gas main supply required
- 3/4" NPT gas connection
- Natural gas 4" W.C., LP gas 10" W.C.
- Units are not supplied with conversion kits.
- Gas type must selected before ordering

Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100
3560 NW 56th St.
Fort Lauderdale, FL 33309 USA

Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
5659 Royalmount Ave.
Montreal, QC H4P2P9 CANADA

sales@mvpgroupcorp.com
www.mvpgroupcorp.com